

FEATURES




- PCB mounted RCD module
- Excellent accuracy
- Fluxgate current sensor with toroidal core
- Switching push-pull outputs
- Compact design

APPLICATIONS

Mainly used for stationery and mobile applications:

- Compliance With UL2231-2

OUTLINE DRAWING

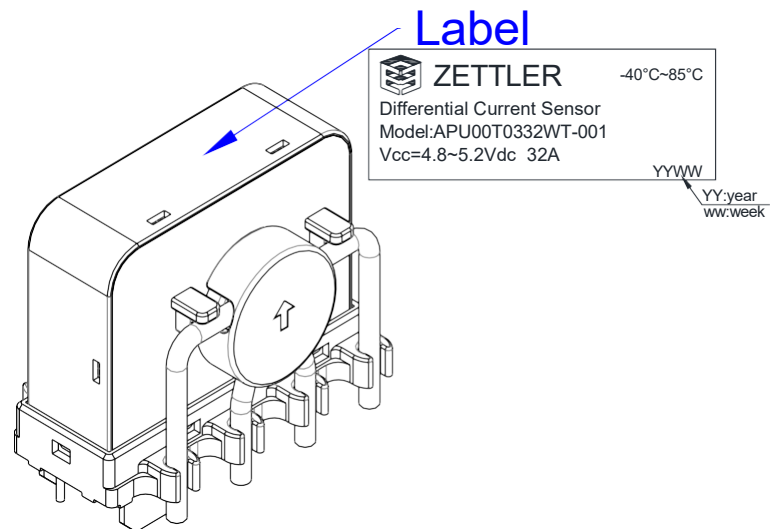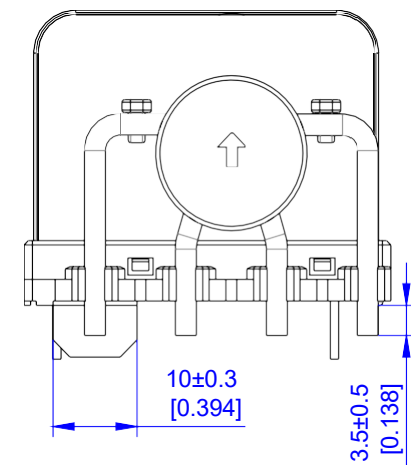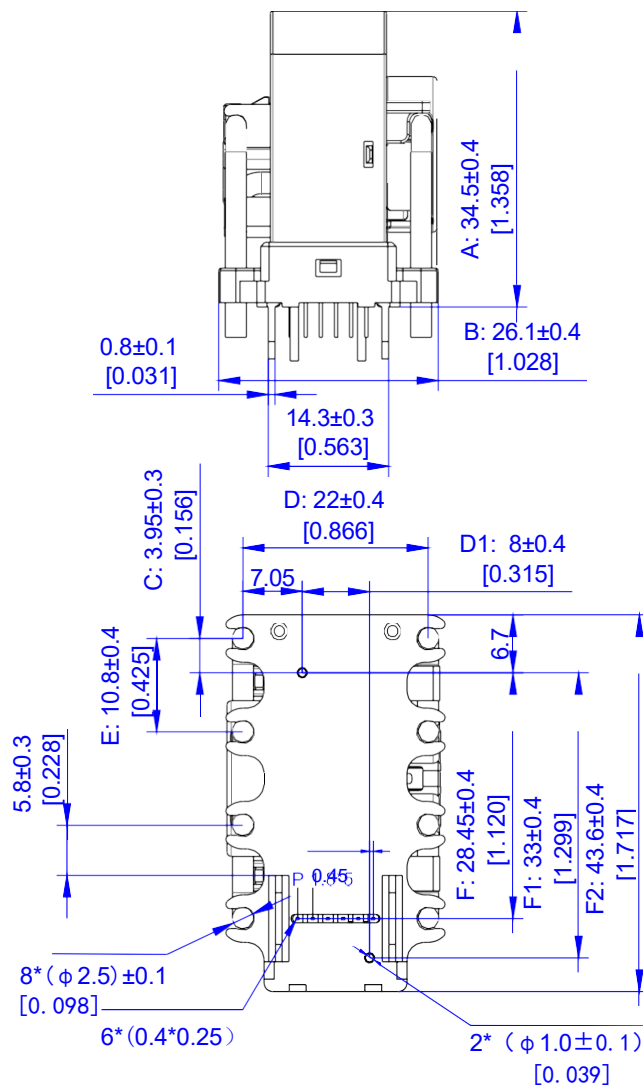


TYPICAL APPLICATION DIAGRAM

General description of sensor function:

The Sensor is sensitive to AC and DC current and can be used for fault current detection in Charging systems acc. to UL2231.

The Sensor detects AC and DC fault currents according to UL2231-2. In the event of an AC fault current (5mA rms), PIN 4 will change its state from a low level (GND) to high level state (5V). In the event of an AC fault current (20mA rms), PINs 4 and 5 will change state from a low level (GND) to a high-level state.

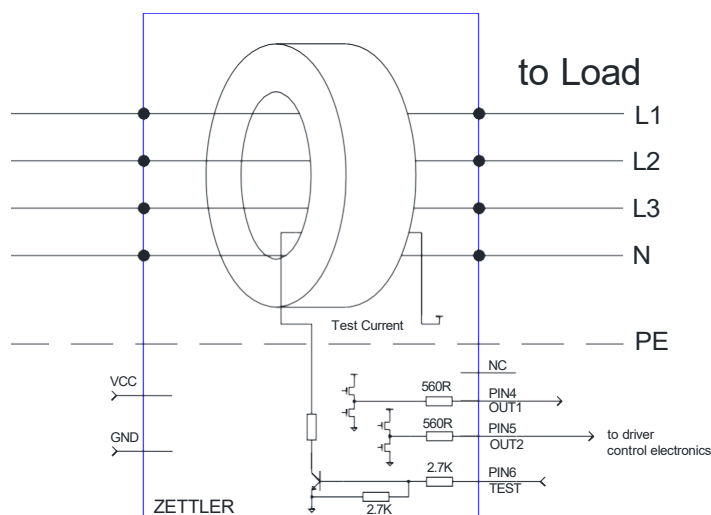

OUT1(PIN4)	OUT2(PIN5)	State
GND	GND	Normal condition
High level	GND	>5mA rms
High level	High level	>20mA rms
OUT1 triggers from $I_d \geq 5\text{mA AC rms AND } \geq 30\text{mA DC}$ OUT2 triggers from $I_d \geq 20\text{mA AC rms AND } \geq 56.56\text{mA DC}$		

PIN description:	
PIN no.	Description
PIN 1 --> VCC	Positive supply voltage 5V
PIN 2 --> GND	Ground connection
PIN 3 --> N.C.	Not Connected
PIN 4 --> OUT1 (push-pull output)	If the residual current is below 5mA rms and no system fault occur the output on PIN 4 is a low level (GND). In any other case PIN 4 is in a high level state (5V). If PIN 5 is high level, PIN 4 will also be set to high level. This PIN is for the CCID5 applications.
PIN 5 --> OUT2 (push-pull output)	If the residual current is below 20mA rms and no system fault occur the output on PIN 5 is a low level (GND). In any other case PIN 5 is in a high level state (5V). This PIN is for the CCID20 applications.
PIN 6 --> TEST(refer to figure)	A function test is activated if this PIN is connected to high level. Attention: During the functional test no differential current shall flow. If a push-pull switch is used, the voltage range must be 0V...5V.
PIN 9 -- PIN16	For primary wires connection

ELECTRICAL SPECIFICATION

Symbol	Parameter	Condition	min.	typ.	max.	Unit	remark
I_P	Primary rated current (1phase / 3phase)			32	40	A	
$I_{\Delta N, \max}$	Measuring range (peak)		-300		300	mA	
f_{BW}	Frequency range		DC		1	kHz	
$I_{\Delta N1}$	Rated residual operating current 1		4	5	6 ⁽¹⁾ 12 ⁽²⁾	mA rms	(1) f = 60Hz (2) f = 70Hz to 1kHz
$I_{\Delta N2}$	Rated residual operating current 2		15	20	20 ⁽¹⁾ 50 ⁽²⁾	mA rms	(1) f = 60Hz (2) f = 70Hz to 1kHz
Tr	Response time	AC: $I_n = 1 \cdot I_{\Delta N2}$		150	1000	ms	Interrupting Time according to UL2231-2 $Tr = (20/I_n)^{1.43}$
		AC: $I_n = 2 \cdot I_{\Delta N2}$		40	371		
		AC: $I_n = 5 \cdot I_{\Delta N2}$		20	100		
	Response time	AC: $I_n = 1 \cdot I_{\Delta N1}$		600	7260		
		AC: $I_n = 2 \cdot I_{\Delta N1}$		200	2690		
		AC: $I_n = 5 \cdot I_{\Delta N1}$		80	560		
$I_{\Delta R1}$	Hysteresis recovery current level for $I_{\Delta N1}$ (absolute value dc)			2.5		mA	OUT1 will remain in their states until I_{Δ} is below the recovery threshold $I_{\Delta R1}$
$I_{\Delta R2}$	Hysteresis recovery current level for $I_{\Delta N2}$ (absolute value rms)			10		mA	OUT2 will remain in their states until I_{Δ} is below the recovery threshold $I_{\Delta R2}$
V_{CC}	Supply voltage		4.8	5	5.2	V	
I_{CC}	Consumption current			10	30	mA	
T_A	Ambient operation temperature		-40		85	°C	

Absolute maximum ratings

Symbol	Parameter	Condition	min.	typ.	max.	Unit	remark
V_{PIN}	Voltage on pins with respect to GND (PINs 1, 4, 5 and 6)				5.5	V	
I_{PIN}	Current on pins (PINs 1, 4 and 5)				50	mA	
U_{MAX}	Maximum rated voltage of primary conductors				440	V	

PCB Footprint:


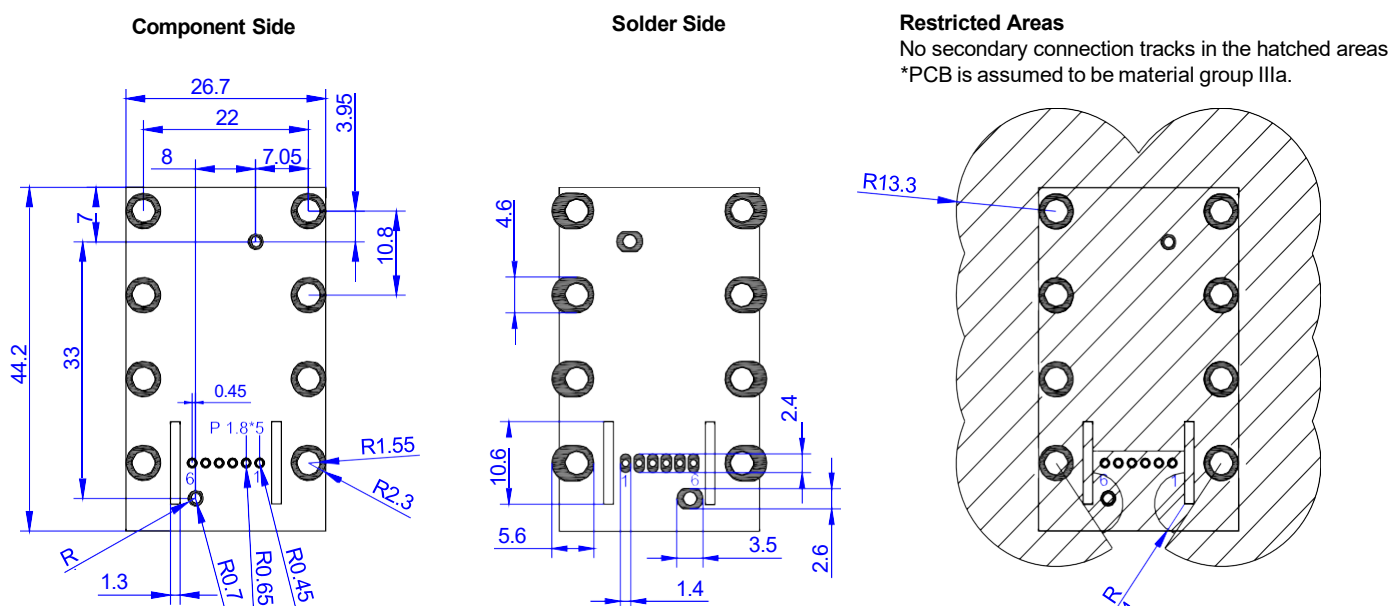


Figure:

After activating the test sequence, the end product has to monitor the correct state of the switching outputs being used at the following points in time.

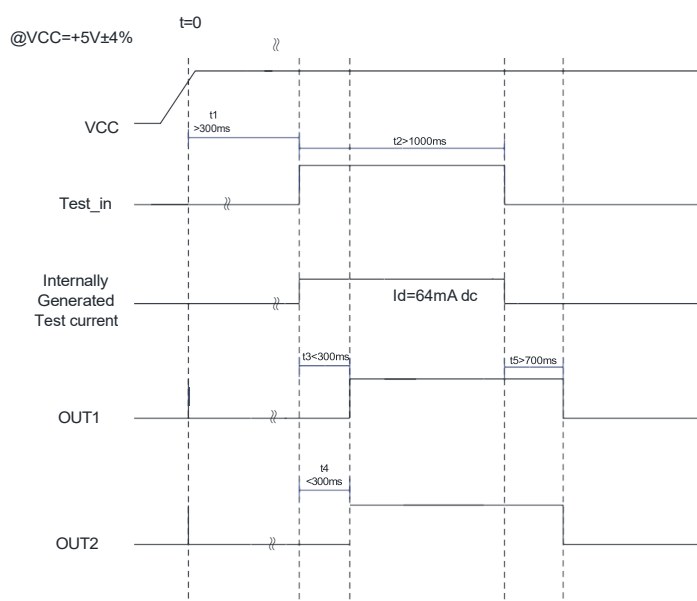

Item	Description	Notes	Timing(ms)		
			Min.	Typ.	Max.
t1	Delay before self-test		300	-	-
t2	Self-test duration		1000	-	-
t3	response time	the response time to self-test current of OUT1	-	100	300
t4	response time	the response time to self-test current of OUT2	-	100	300
t5	Delay time	Response delay after removing the self-test current	700	900	-