






# SEALED TRANSFORMER, PCB 1.5VA EI 30-10.5 SERIES

## 1. ELECTRICAL SPECIFICATIONS:


- A. Input Voltage and Frequency: 115/230V @ 50/60 Hz
- B. Secondary Voltage: See Electrical Table
- C. Ambient Temperature: 40° C MAX allowed.
- D. Insulation Resistance:  
100M Ohm Min @ 500VDC PRI. to SEC.
- E. Hi-Pot:  
4200Vrms 1 minute @ PRI. to SEC. ,when the primary input voltage is 230V  
2800Vrms 1 minute @ PRI. to SEC. ,when the primary input voltage is 115V
- F. Approvals:  
UL506,UL1585 class 2 and class 3,VDE,EN61558,EN60950  
In addition 230V input transformers also have CQC certification

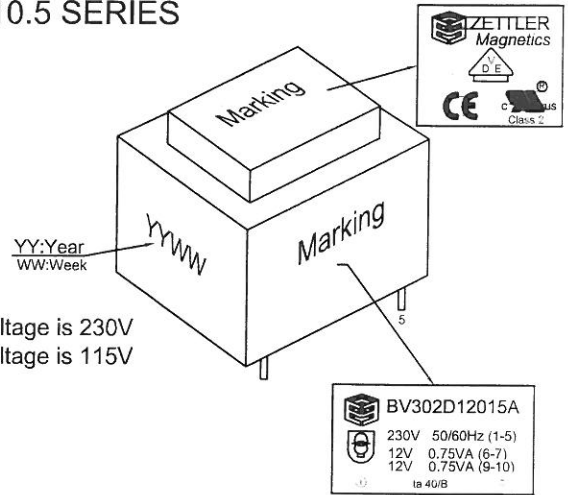


## 2. MECHANICAL SPECIFICATIONS:

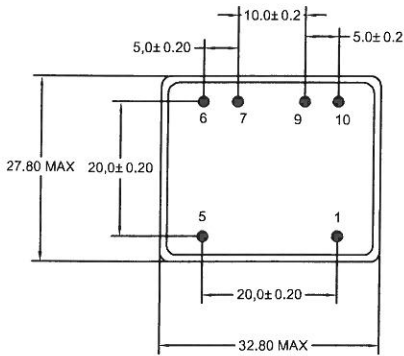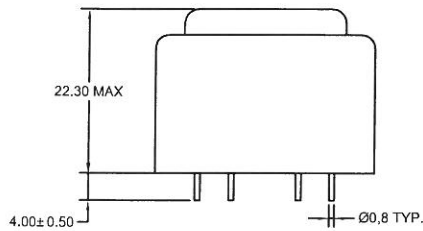

Dual outputs

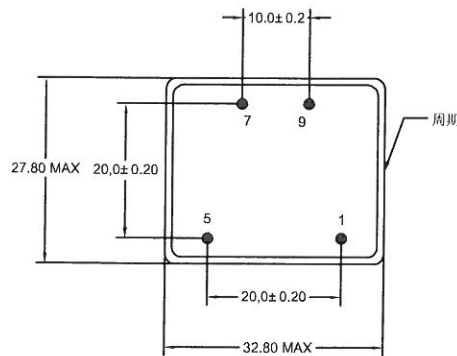

Single output



REV.	DESCRIPTION	DRAWN	DATE(M/D/Y)

TOLERANCE	SCALE NOT 1:1	UNIT mm	DATE (M/D/Y)	MODEL DESCRIPTION
X	±0.3	DRAWN	Janise	2012-10-17
X.X	±0.2	CHECKED	Janise	2012-10-17
X.XX	±0.1	APPROVED	Yehua	2012-10-17
THICKNESS	/			
REV.	A0			

<b>ZETTLER MAGNETICS</b>	MATERIAL 120° C or higher
	MODEL: EI 30-10.5 1.5VA
	SHEET: 1 OF 2

<b>TITLE</b> EI 30-10.5 1.5VA
----------------------------------

